

9-18-00

A

09/15/00
jc905 U.S. PTO
09/663250
09/15/00

Patent No. 20350
TOWNSEND and TOWNSEND and CREW LLP
Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
(415) 76-0200

**ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
Washington, D.C. 20231**

Attorney Docket No. 18608-001910

"Express Mail" Label No. EL140090364US

Date of Deposit: September 14, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above, addressed to:

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- ☒ [X] patent application of
- ☐ [] continuation patent application of
- ☐ [] divisional patent application of
- ☐ [] continuation-in-part patent application of

Assistant Commissioner for Patents
Washington, D.C. 20231

By: Stuart McLeish
Stuart McLeish

Inventor(s)/Applicant Identifier: DAVID G. MATSUURA et al.

For: ANNULOTOMY CLOSURE DEVICE

- ☒ [X] This application claims priority from each of the following Application Nos./filing dates:
US 60/154,969 filed September 20, 1999
the disclosure(s) of which is (are) incorporated by reference.

Enclosed are:

- ☒ [X] 18 total page(s) of text
- ☒ [X] 5 page(s) of claims
- ☒ [X] 1 page of Abstract
- ☒ [X] 13 sheet(s) of informal drawing(s).
- ☒ [X] An unsigned Declaration.
- ☒ [X] Return Postcard

**In view of the Unsigned Declaration as filed with this application and pursuant to 37 CFR §1.53(f),
Applicant requests deferral of the filing fee until submission of the Missing Parts of Application.**

DO NOT CHARGE THE FILING FEE AT THIS TIME.

David Heckadon

David Heckadon
(Granted Limited Recognition under 37 CFR §10.9(b)
see enclosed Limited Recognition Document)
Attorneys for Applicant

Telephone:
(415) 576-0200

Facsimile:
(415) 576-0300

**PATENT APPLICATION
ANNULOTOMY CLOSURE DEVICE**

Inventor(s):

DAVID G. MATSUURA, a citizen of United States, residing at,
859 Summersong Court
Encinitas, California 92024

WALTER D. GILLESPIE, a citizen of United States, residing at,
8652 Hayes Street
La Mesa, California 91941

JAMES F. MARINO, a citizen of United States, residing at,
2620 St. Tropez Place
La Jolla, California 92037

SELISE M. PASTORE, a citizen of United States, residing at,
1837 Spalding place
San Diego, California 92116

Assignee:

NuVasive, Inc.
10065 Old Grove Road
San Diego, CA 92131

Entity: Small

TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
Tel: 650-326-2400

005760-05223950

ANNULOTOMY CLOSURE DEVICE

CROSS-REFERENCES TO RELATED APPLICATIONS

5 The present application is a continuation application claiming priority from Provisional U.S. Patent Application No. 60/154,969 filed September 20, 1999, which is incorporated herein by reference in its entirety for all purposes.

TECHNICAL FIELD

10 The present invention relates to systems for sealing holes in body parts and to sealing surgically formed holes in a bony structure in general and in particular to systems for providing closure of a surgical access hole in an intervertebral disc following an annulotomy.

BACKGROUND OF THE INVENTION

15 Each intervertebral disc has a firm outer layer, called the annulus fibrosus, and a gelatinous interior called the nucleus pulposus. The annulus fibrosus acts as a semi-rigid elastic pressure vessel to contain the nucleus pulposus, therefore creating a compliant interface between the relatively rigid vertebrae above and below each disc. Adjacent to each disc, a pair of nerve roots pass from the spinal canal through apertures called intervertebral
20 foramen on each side of the spine. Due to the location of the nerve roots, they are vulnerable to pressure from a herniated disc. In certain instances, the herniated section of the annulus fibrosus may become thinner through the transverse plane of the disc.

 When a partial intervertebral discectomy is performed, the offending portion of the herniated disc is excised. In this procedure, the surgeon must first
25 make an appropriate incision through the skin and other tissue layers, and then typically create an access hole into the herniated annulus (an annulotomy) to treat the offending tissue. Such access holes are created with a variety of surgical instruments including scalpels, probes, trephines, etc., and the access hole may range in size from 3 to 6 mm in diameter. Furthermore, as instruments are passed through the circular hole, the hole may become
30 enlarged or elongated in nature upon completion of the procedure. Upon entry to the interior annular space, the offending tissue is then manipulated and/or removed by the surgeon. In current practice, the surgeon closes the outer wounds created by the procedure, but leaves the access hole open. Due to the semi-rigid nature of the annular tissue, closure by means of

traditional tissue approximation techniques, such as suturing, is nearly impossible. Closure is further complicated by the proximity of nerves and the depth of the access hole below the surface of the skin. As a complication of disc excision surgery, such annular defects can represent a potential liability with respect to subsequent recurrent disc herniations. This is due to the fact that the annular defect between the interior space of the annulus and the area adjacent to the annulotomy allows for possible future passage of nucleus pulposus tissue therethrough. During the course of normal movement by the patient during the post operative healing phase, (which may last up to several weeks), relatively high fluidic pressures can be generated within the annular space. These high pressures can cause the nucleus pulposus to be extruded through the open hole and impinge upon nearby nerves, thus causing a reoccurrence of the original symptoms that the surgeon intended to treat.

SUMMARY OF THE INVENTION

The present invention provides methods and apparatus for the closure of holes, including surgical access holes formed in a rigid or semi-rigid body, and is particularly useful in closing a surgical access hole in an intervertebral disc. As such, the present invention provides systems of annulotomy closure which reduce the risks of reherniation.

In a first aspect of the invention, a system comprising a generally cylindrical-shaped mesh is used to seal a hole which may be a surgical access hole. The mesh itself may preferably comprise a braid of separate strands with each strand following a helical path around a central longitudinal axis such that the mesh comprises a flexible tube of interwoven springs. In various optional aspects, at least one of the proximal (i.e.: outer surface) and distal (i.e.: deep) ends of the cylindrical-shaped mesh may optionally be covered by an end-cap which may be made of the mesh material.

In this first aspect of the invention, the mesh cylinder may first be inserted into the hole in the annulus and positioned such that both the proximal and distal ends of the mesh extend somewhat out of the respective proximal and distal ends of the hole. Thereafter, the proximal end of the mesh can be pushed longitudinally in a distal direction through the “interior” of the mesh (ie: through the central tube defined by the cylindrically-shaped mesh body) to a distance such that the proximal end may pass fully through the interior of the mesh, and extend in a distal direction at least partially past the distal end of the mesh. This causes the mesh cylinder to become folded over upon itself, with one end of the mesh being

folded into the center of the mesh.

In further aspects, the distal end of the cylindrical-shaped mesh may be pulled in a proximal direction such that a region of the mesh adjacent the distal end expands radially outwards, bulging around the inner (distal) perimeter of the distal end of the hole. Furthermore, the proximal end of the cylindrical mesh can be pushed in a distal direction such that a portion of the mesh adjacent the proximal end of the hole expands radially outwards, bulging around the outer (proximal) perimeter of the hole.

The present invention also provides a method of sealing a hole in a body part, comprising introducing a generally cylindrical shaped mesh into the hole and then moving at least one end of the cylindrical shaped mesh at least partially through an interior portion of the cylindrical shaped mesh such that the mesh expands radially outwards against sides of the hole.

The pushing of the proximal end in a distal direction and/or the pulling of the distal end in a proximal direction will preferably tend to cause the cylindrical shaped mesh to expand radially outwards, thereby firmly anchoring the mesh against the walls of the hole in the annulus.

In further preferred aspects, the proximal and distal ends of the cylindrical mesh can be formed to be of a fixed diameter such as by the attachment or formation of a non-expandable ring thereon.

A plurality of suture/tethers may optionally be attached to the distal end of the mesh to pull it in a proximal direction. Tubular inserters for positioning the cylindrical mesh within the bore of the hole may also be provided.

In various aspects, the diameter of one end of the mesh is constructed to be smaller than that of the other end of the mesh such that a first end can easily be pulled through a second end of the mesh. In specific preferred aspects, the diameter of the proximal end will be smaller than that of the distal end.

In an alternate method of employing the present invention, each of the proximal and distal ends of the cylindrical mesh may be pulled partially into the center of the cylindrical mesh (ie: pulled partially through the interior tube defined by the mesh body) such that the proximal end is moved distally and the distal end is moved proximally, towards, or optionally passing through, one another.

In a second aspect of the invention, various systems for sealing a surgically cut hole in the disc are provided comprising a generally planar sheet-like material which is cut or

formed into a circular pattern having a plurality of radially extending “flower petal”-type extensions. These petals are first bent radially inwards giving the structure a generally conical shape. The petals will then tend to flex radially outwards when released after the device has been placed into the hole in the annulus, thereby sealing the hole. Specifically, the resultant conical structure of the second aspect of the invention is inserted longitudinally into the hole in the annulus and is then released such that the petals will tend to flex radially outwards, thereby anchoring the structure in position in the hole. In this aspect of the invention, the spaces cut between successive radially extending petals may be adapted to permit some fluid movement therethrough. In various designs of this aspect of the invention, a plurality of such sheet-like “flower petal” structures are bent into a conical shape and are inserted in succession into the hole.

Advantages of both aspects of the present invention include its encouragement of rapid healing by providing a lattice structure to enhance tissue growth. Moreover, the present annulotomy closure systems are also able to accommodate the various sizes and geometries of annular holes that may be encountered by the surgeon. Furthermore, the present annulotomy closure systems all provide compensation for normal movement during patient healing since the system itself remains transversely flexible but is positionally stable along its longitudinal axis. A further advantage of the present system is that should any portion of the mesh remain on the outside of the hole on the annulus, this would be atraumatic to adjacent nerves in close proximity to the device due to the soft and flexible nature of the mesh material.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a cylindrical shaped mesh.

Fig. 2 is a sectional side elevation view of the cylindrical mesh of Fig. 1 positioned in a hole in the annulus of an intervertebral disc.

Fig. 3 is a sectional side elevation view of a tubular shaped mesh.

Fig. 4 is a sectional side elevation view of the mesh of Fig. 3 received through a hole in an intervertebral disc.

Fig. 5 is the system of Fig. 4 after the distal end of the mesh has been pulled in a proximal direction, causing a portion of the mesh to expand around the inner surface of the hole.

Fig. 6 shows the system of Fig. 4 after the proximal end of the mesh has been pushed in a distal direction, causing a portion of the mesh to expand around the outer surface of the hole.

Fig. 7 shows the system of Fig. 6 after the proximal end of the mesh has been pushed distally through the distal end of the mesh.

Fig. 8 is a perspective view of a system for delivering the tubular mesh illustrated in Figs. 3 to 7.

Fig. 9 is a sectional side elevation view of the mesh of Fig. 1 in a first position.

Fig. 10 is a sectional side elevation view of the mesh of Fig. 1 in a second position.

Fig. 11 is a perspective view of an alternate aspect of the first embodiment of the present invention.

Fig. 12A is a sectional side elevation view of the system of Fig. 11 positioned in the annular hole.

Fig. 12B is a side elevation view corresponding to Fig. 12A, but with the system distally advanced into the hole.

Fig. 13A is a front elevation view of a second aspect of the present invention.

Fig. 13B is a side elevation view of the device of Fig. 13A.

Fig. 14 is a side elevation view of the system of Figs. 13A and 13B deformed into a conical shape and inserted into a surgical access hole in an intervertebral disc.

Fig. 15 is a front view of different designs for the second aspect of the present invention shown in Figs. 13A and 13B.

Fig. 16 is a side elevation view of a plurality of devices as illustrated in Figs. 13A, 13B or 15 deformed into conical shapes and inserted into a surgical access hole in an intervertebral disc.

Fig. 17 corresponds to Fig. 16 but illustrates the apexes of the conical shapes pointing in opposite directions.

Fig. 18 is a side elevation view of a pair of systems as illustrated in Figs. 13A, 13B or 15 for insertion into a surgical access hole in oppositely facing directions.

Fig. 19 shows a side view of the system arrangement of Fig. 18, but with the conical shaped structures deformed into an inverted position.

Fig. 20 shows a side view and an enlarged close-up view of the conical shaped structures of Fig. 18 and 19 interlocked together.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

The present invention provides methods and apparatus for sealing holes in various bony structures. In a preferred aspect, the present invention provides methods and apparatus for sealing a surgical hole drilled in a patient's annulus. As such, the present invention is ideally suited to seal a hole drilled in an intervertebral disc such that nucleus pulposus on the inside of the disc cannot seep or flow through the hole to the outside of the disc as the disc is compressed during normal movement. The present system is not limited only to sealing holes which have been drilled in an annulus, but may also be used to seal naturally occurring holes as well. Moreover, the present invention is not limited to sealing holes in the annulus alone but may be used to seal any hole, thereby inhibiting the passage of soft tissue therethrough.

Fig. 1 shows a generally cylindrical tubular mesh which is comprised of a multiplicity of monofilament or multifilament strands 13 of suture-type material, each following a helical path about central longitudinal axis A. Mesh 10 has a proximal end 12 and a distal end 14. An advantageous property of mesh 10 is that as proximal end 12 and distal end 14 are moved closer together with respect to one another, mesh 10 will tend to expand radially outwards, widening in its diameter D.

In a preferred design, the mesh diameter D is approximately 1 to 8, millimeters, and more preferably about 3 millimeters when mesh 10 is in its relaxed state, (i.e.: when ends 12 and 14 are not being pushed together). When ends 12 and 14 are pushed together, however, diameter D of mesh 10 may reach 9 millimeters. In preferred designs, strands 13 may each be made of 0.15 millimeter polypropylene sutures. Other materials having suitable dimensions, bioabsorption, strength, spring rate or radiopacity may also be used.

In an optional aspect, proximal end 12 may be sealed, for example with a mesh closure positioned thereover. In another optional aspect of the invention, as will be explained, ends 12 and 14 may be formed to be non-expandable such that their diameters do not change as ends 12 and 14 of mesh 10 are pushed together relative to one another. For example, a solid ring may be formed at, or attached to, one or both of ends 12 and 14.

Fig. 2 illustrates a preferred method of operating the present invention, as follows. Mesh 10 is inserted longitudinally in distal direction D into surgically cut hole 21 in disc 20 such that proximal end 12 and distal end 14 extend out of hole 21 past outer surface 11 and inner surface 13 of hole 21 in disc 20 as defined by walls 22 as shown.

As is shown in Fig. 3, mesh 10 may optionally be fitted with a plurality of sutures/tethers 30 which are tied to the distal end 14 of mesh 10 and extend through the central chamber of mesh 10 as shown.

As shown in Fig. 4, mesh 10 is inserted in a distal direction D such that it is positioned in hole 21 with its distal end 14 extending past inner surface 13 of disc 20, and with its proximal end 12 extending past outer surface 11 of disc 20. The placement of distal end 14 at an appropriate distal depth such that a portion of mesh 10 extends in a proximal direction from outer surface 11 of hole 21 can be enhanced through various visualization techniques such as shaft depth markers or endoscopic, radiographic or ultrasound methods.

For clarity of illustration, to show both the side walls of hole 21 and mesh 10, the following Figs. show a small clearance between the walls of the mesh and the walls of the hole when the mesh has been expanded into position, (for example, by pushing proximal end 12 and distal end 14 together, or through the central longitudinally extending chamber of the mesh). It is to be understood that such clearance would not exist as mesh 10 becomes anchored against walls 22 when positioned.

Following the step shown in Fig. 4, suture tethers 30 are preferably pulled in proximal direction P while proximal end 12 is held in a fixed position relative to hole 21, (as shown in Fig. 5). When pulled by suture/tethers 30, distal end 14 will tend to move in proximal direction P such that mesh 10 will expand radially in diameter in the region of the mesh pushing outwardly against the inner surface of hole 21, and forming a bulge 15 at mesh distal end 14 against inner surface 13.

Thereafter, as is shown in Fig. 6, a rod 40, (which can be used to hold proximal end 12 in position relative to hole 21 while pulling on suture tethers 30 as illustrated in Fig. 5), can be used to push distal end 12 in distal direction D such that the region of mesh 10 between distal end 12 and outer surface 11 will tend to expand around the proximal end of hole 21, forming a bulge 17 against outer surface 11, as shown. In this aspect of the invention, proximal end 12 may optionally be formed to be non-expandable, for example by attachment to a fixed diameter ring therearound.

The effect of mesh 10 being deformed to form respective bulges 17 and 15 at the outer surface 11 and inner surface 13 of disc 20 will be to hold mesh 10 at a fixed longitudinal position relative to hole 21 (such that it doesn't move in either a proximal or distal direction).

Thereafter, as is shown in Fig. 7, distal end 12 may optionally be pushed longitudinally in distal direction D such that it passes through the center of the mesh such

that it extends out through distal end 14. In this aspect of the invention, distal end 12 may be formed to be non-expandable and have a slightly larger diameter than that of distal end 14 such that distal end 12 can pass through distal end 14 and be snap-fit through the opening of distal end 14.

Fig. 8 is a perspective view of a system for delivering and positioning mesh 10 into hole 21 of the disc 20 as illustrated in Figs. 1 to 7. Rod 40 may be used to support proximal end 12 at a fixed position relative to hole 21 when suture/tethers 30 are used to pull distal end 14 in a proximal direction. In addition, rod 40 can be used to push proximal end 12 through distal end 14, as was shown in Fig. 7. Suture/tethers 30 which may preferably comprise three tethers anchored to distal end 14 at locations which are spaced radially 120° apart may be received over push rod 40 as shown. A tubular inserter 35 is then received thereover. Inserter 35 may be used for pushing mesh 10 against the proximal end of hole 21 as is shown in Fig. 6 so as to create bulge 17. Suture tethers 30 may preferably be cut or removed after insertion.

In another aspect of the invention, as illustrated in Figs. 9 and 10, each of the proximal and distal ends of the cylindrical mesh may be pulled inwardly towards the longitudinal center of the cylindrical mesh such that the proximal end is moved distally and the distal end is moved proximally, as follows.

Fig. 9 shows a sectional elevation view of the mesh of Fig. 1 in a first position wherein distal end 14 has been pulled partially through the center of the cylindrical mesh 10 such that distal end 14 is received within the central body portion of mesh 10. Thereafter, as shown in Fig. 10, proximal end 12 is then pushed partially through the center of the cylindrical mesh 10 such that proximal end 12 is also received within the central body portion of mesh 10.

In the aspect of the invention shown in Figs. 9 and 10, mesh 10 will especially tend to expand radially at outer surface 11 and inner surface 13 close to ends 12 and 14 as shown. Expansion of mesh 10 in these regions will cause formation of bulges immediately outside of the distal and proximal ends of hole 21 as shown. Such bulges will tend to anchor the mesh such that it does not move longitudinally in hole 21. In the aspect of the invention shown in Figs. 9 and 10, both proximal end 12 and distal end 14 may optionally be covered by mesh or end caps since these ends need not pass through one another.

In this and the above discussed aspects of the invention, outward radial forces of the portions of the mesh which are curled within the main body of the mesh will preferably

act against the outside walls of the outer tube creating frictional loads along the longitudinal axis that far exceed the unfolding tendency of the mesh.

A further advantage of the present invention is that it may be adapted to compensate for both thick or thin annular walls. For example, should the length of hole 21 be slightly longer than the length of mesh 10, ends 12 and 14 will still be fully engaged within hole 21. Another advantage of the present invention is that the exposed portions of the mesh projecting out of hole 21 (e.g.: bulges 15 and 17) will be atraumatic, minimizing any potential irritation due to tissue contact due to the soft and flexible nature of the mesh.

An alternate aspect of the first embodiment of the present invention is shown in Figs. 11 to 12B, as follows. A mesh 50, (similar in characteristics to mesh 10 as described above), is provided. As seen in the cross sectional view of Fig. 12A, a suture/tether 52 runs from distal end 54 through the center of installation tube 60. As mesh 50 is advanced distally into hole 21, as shown in Fig. 12B, it will form a "reversing funnel" shape with the outer edges of mesh 50 wrapping over the body of the mesh inserted therethrough.

Figs. 13A and 13B show respective front and side views of a second design of the present invention in which device 100 comprises a generally planar sheet of material which is cut or formed in a circular shape, having a plurality of radially extending "flower petal" extensions 102. These devices allow pressure equalization through the venting of lower viscosity fluids but retain higher viscosity fluids and solids.

When inserted into a surgical access hole, petals 102 are first flexed radially inward in direction I. Accordingly, sheet 100 assumes a generally conical shape when inserted into hole 21 in intervertebral disc 20, as is shown in Fig. 14. After device 100 has been positioned in hole 21, (for example with a rod), petals 102 are released. Accordingly, petals 102 will tend to "spring back", moving radially outwards in direction O such that petals 102 will press against the outer surfaces 22 of hole 21 thereby anchoring device 100 in position in hole 21. As such, petals 102 act as cantilever leaf springs anchoring device 100 in position in hole 21, thereby resisting outward (i.e. proximal) loading due to extruding nucleus pulposus.

As is shown in Fig. 15, optional barbs 104 may also be provided at the distal ends of petals 102 to assist in anchoring petals 102 of device 100 against walls 22 of hole 21. Fig. 15 shows a variety of alternate designs with differently shaped petals 102. Fig. 15 also shows an optional design for a sheet 120 which does not have petals. Rather, such a sheet is preferably crimped into a conical shape such that it can be positioned in hole 21. Thereafter sheet 102 will expand (ie: flatten itself) to seal hole 21 with holes 121 allowing for fluid

movement similar to the movement permitted between adjacent petals 102 as shown in other aspects of the invention.

Device 100 may preferably be formed to accommodate hole 21 having an inner diameter ranging from one-half to three quarters of the disc diameter in its free and flattened state. Device 100 can be formed from wire or molded from plastic.

In preferred aspects, a plurality of devices 100 can be inserted into hole 21 in sequence as shown in Fig. 16. Such an arrangement has the advantage of further restricting the movement of nucleus pulposus out of the center of disc 20. Fig. 17 corresponds to Fig. 16 but with the apexes 101 of devices 100a and 100b pointing in opposite directions.

Figs. 18, 19 and 20 show successive steps in a method of inserting oppositely facing interlocking devices 100. Referring to Fig. 18, discs 100a and 100b are first introduced into hole 21 (not shown) in an orientation such that their apexes 101a and 101b are pointing in opposite directions. A positioning rod 120 is used to push devices 100a and 100b together such that devices 100a and 100b become inverted such that their apexes 101a and 101b will be pushed together. As is seen in Fig. 20, apexes 101a and 101b can comprise interlocking features such that they can be assembled to interlock together thereby forming a solid structure which tends to reduce radial movement of the respective apexes.

Experimentally Developed Embodiments:

The Applicants of the present invention have succeeded in constructing various experimental embodiments of the present invention, as follows. These experimental embodiments are meant to illustrate various exemplary systems in accordance with the present invention. The present invention is not limited to the experimental embodiments described herebelow. Rather, any suitable system for achieving the structures and methods of the present invention as claimed is considered within the scope of the present invention.

Mesh 10 of the present invention was experimentally constructed as a braided tube approximately 3 mm in diameter when in the relaxed state, and at least 9 mm in diameter when expanded. This tube was braided from 24 individual strands of .15 mm polypropylene suture. Alternatively, however, various numbers of strands may be employed in the braiding of the tube.

An experimental embodiment of mesh 10 was constructed from a 45 mm length of braid which is cut and then placed over a heat resistant mandrel that just fits inside of the braid. The mandrel may preferably be fabricated from a machineable ceramic. A 12 mm long stainless steel tube whose inside diameter just fits over the braid may be placed over

the braid/mandrel assembly with approximately 1 mm of braid exposed over the mandrel. The braid/mandrel/tube assembly was then placed in a lathe chuck or other machine capable rotating the assembly about it's longitudinal axis in a controlled manner. The end of the braid was then radiantly heated to just past the melting point of the braid polymer. The braid end

5 was reformed to create a semi-rigid ring with in inside diameter of approximately equal to the original inside diameter of the braid. By using this non contact method of forming using radiant heat and the fluidic surface tension of the re-flowing polymer, a robust and smooth unitary ring was quickly formed. The whole assembly was then removed from the rotating machinery. The first mandrel was removed from the assembly and a second forming mandrel

10 was inserted in it's place. The second forming mandrel was made of a machineable ceramic material, and one end of the mandrel being formed with a tapered bullet shaped tip. The bullet tip was placed even with the tapered tip at the end of the proximal end of the braid. The 12 mm long stainless steel tube was then placed over the braid/mandrel assembly with approximately 1 mm of braid exposed over the bullet tipped mandrel. The braid/mandrel/tube

15 assembly was again placed in the rotating machinery and slowly rotated about it's longitudinal axis. The proximal end of the braid was then radiantly re-flowed to form a semi-rigid ring with an inside diameter of approximately one half to one quarter of the original braided diameter. The forming process described above can be accomplished in many different ways using a variety of equipment and techniques. Alternatively, rings of non-native

20 material may have instead been secondarily added to the braided tube. The braid was then removed from the forming tools. A long piece of suture was then transversely passed through at least one braid intersection located near the distal end of the device. The tag ends of the suture are then brought together to form a loop with the device near the approximate center of the suture. This loop forming procedure is repeated twice more to form a system of three

25 equally spaced suture loops with a radial spacing of about 120° when viewed from the end. The braid/loop assembly was then placed at the distal end of a long rod or tube whose outside diameter will allow for the longitudinal urging of the proximal end of the device and still allow for diametral clearance of at least two wall thickness of the braid material. The loops of suture were placed along side the length of the urging rod and arranged in a manner to

30 prevent tangling of the tag ends. A second long hollow tube with an outside diameter that allows for passage into the surgical defect and inside diameter that allows for a slight diametral compression of the braid/loop assembly, is passed over the braid/loop assembly until approximately 4 mm of braid is exposed. It is to be understood that appropriate handles,

grips and controls may also be added to the installation tool to enhance placement of the device and ease of use.

005T60 054600

WHAT IS CLAIMED IS:

1 1. A method of sealing a hole in a body part, comprising:
2 introducing a generally cylindrical shaped mesh into the hole; and
3 moving at least one end of the cylindrical shaped mesh at least partially
4 through an interior portion of the cylindrical shaped mesh such that the mesh expands radially
5 outwards against sides of the hole.

1 2. The method of claim 1, wherein moving at least one end of the
2 cylindrical shaped mesh at least partially through an interior portion of the cylindrical shaped
3 mesh comprises:

4 advancing a proximal end of the mesh in a distal direction.

1 3. The method of claim 2, wherein the proximal end is advanced in a
2 distal direction by a push rod.

1 4. The method of claim 2, wherein the proximal end is advanced distally
2 past the distal end.

1 5. The method of claim 2, wherein the mesh bulges around the perimeter
2 of the proximal end of the hole.

1 6. The method of claim 1, wherein moving at least one end of the
2 cylindrical shaped mesh at least partially through an interior portion of the cylindrical shaped
3 mesh comprises:

4 advancing a distal end of the mesh in a proximal direction.

1 7. The method of claim 6 wherein the distal end is advanced proximally
2 past the proximal end.

1 8. The method of claim 6, wherein the mesh bulges around the perimeter
2 of the distal end of the hole.

1 9. The method of claim 6, wherein the distal end is advanced in a
2 proximal direction by pulling on a tether attached to the distal end of the mesh.

1 18. The device of claim 16, wherein the mesh comprises a flexible tube of
2 interwoven springs.

1 19. The device of claim 16, wherein at least one of the proximal and distal
2 ends of the cylindrically shaped mesh are covered by an end cap.

1 20. The device of claim 19, wherein the end cap is made of mesh.

1 21. The device of claim 16, wherein,
2 at least one end of the cylindrical mesh comprises a non-expandable circular
3 ring.

1 22. The device of claim 21, wherein,
2 both the distal and proximal ends of the mesh comprise non-expandable
3 circular rings, wherein the diameter of the one end is smaller than the diameter of the other
4 end.

1 23. The device of claim 24, wherein,
2 the diameter of the proximal end is slightly smaller than the diameter of the
3 distal end such that the proximal end can be snap-fit through the distal end.

1 24. The device of claim 16, further comprising:
2 a plurality of suture-tethers connected to the distal end.

1 25. The device of claim 16, wherein the mesh has a diameter of
2 approximately 1 to 8 millimeters.

1 26. The device of claim 25, wherein the mesh has a diameter of
2 approximately 3 millimeters.

1 27. The device of claim 16, wherein the helical strands are made of
2 polypropylene.

1 28. The device of claim 16, wherein the helical strands have individual
2 diameters of approximately 0.15 millimeters.

- 1 29. The device of claim 16, wherein the distal end is tapered.
- 1 30. A device for sealing a hole in a body, comprising:
- 2 a sheet-like structure comprising a plurality of radially extending
- 3 petals, the petals being adapted to flex radially outwards when bent inwards into a generally
- 4 conical shape.
- 1 31. The device of claim 30, further comprising:
- 2 a barb disposed on the distal end of each of the petals.
- 1 32. The device of claim 30, wherein the petals tend to spring radially
- 2 outwards such that the structure tends to assume a planar form.
- 1 33. A method of sealing a surgically formed hole in a body, comprising:
- 2 inwardly bending a plurality of petals extending from a generally planar sheet
- 3 of material, such that the sheet of material assumes a conical shape;
- 4 introducing the structure into the hole;
- 5 allowing the bent petals to spring radially outwardly, such that the petals of the
- 6 structure push against the walls of the hole, thereby anchoring the structure in the hole.
- 1 34. The method of claim 30, wherein the structure is inserted into the hole
- 2 with the petals angled in a proximal direction.
- 1 35. A method for sealing a hole in a body, comprising:
- 2 inserting a plurality of sheet-like structures into the hole, each comprising a
- 3 plurality of radially extending petals, the petals being adapted to flex radially outwards when
- 4 bent inwards into a generally conical shape.
- 1 36. The method of claim 35, wherein two structures are inserted into the
- 2 hole with their respective apexes facing towards one another.
- 1 37. The method of claim 36, wherein the two apexes further each comprise
- 2 an interlocking portion such that the two structures are interlocked together.

- 1 38. The method of claim 35, wherein each of the two structures are
2 initially inserted with their apexes pointing away from one another.

005760" 05223760

ANNULOTOMY CLOSURE DEVICE

ABSTRACT OF THE DISCLOSURE

5 A system for sealing a hole in a body, comprising a generally cylindrical mesh
formed from a plurality of helical strands which is inserted into the hole, with at least one end
of the cylindrical mesh being moved least partially through an interior portion of the
cylindrical shaped mesh such that the mesh expands radially outwards against sides of the
hole.

10 PA 3096241 v1

005160 "0526360

FIG 1


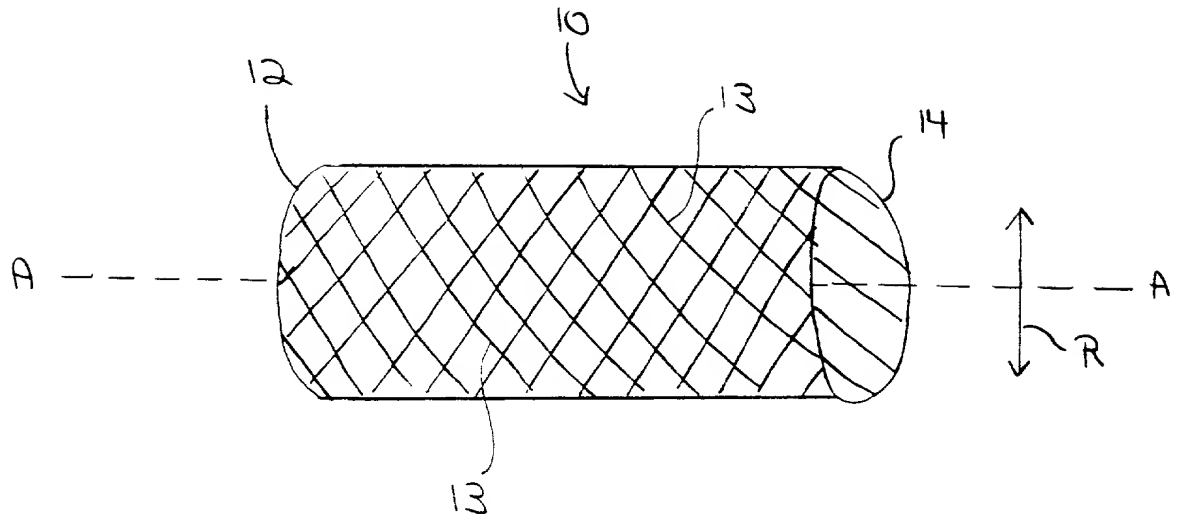


FIG 2

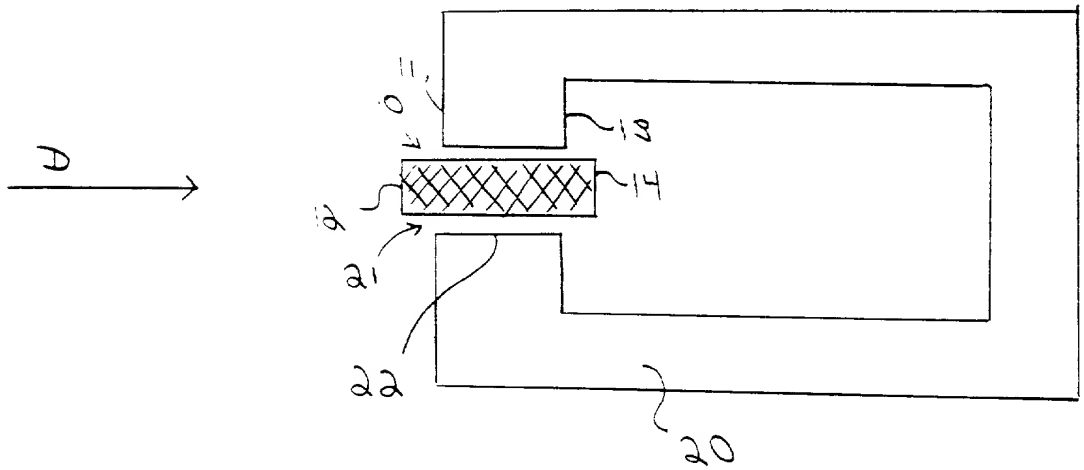



[illegible][illegible]

FIG 5

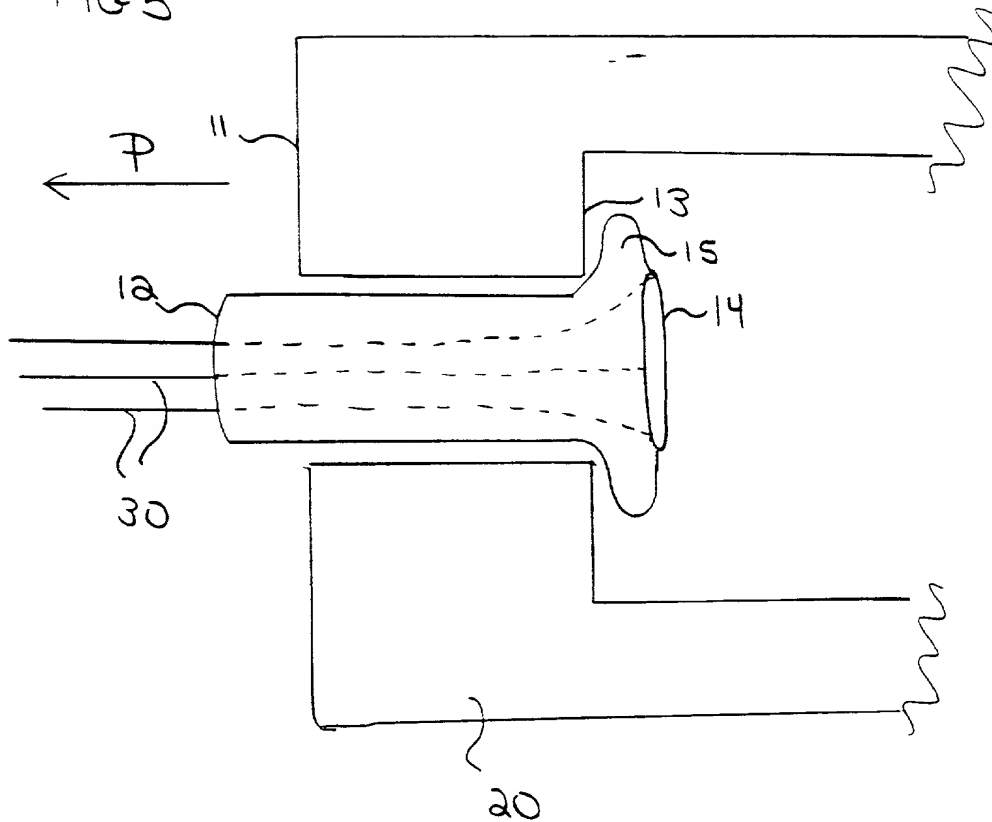


FIG 6

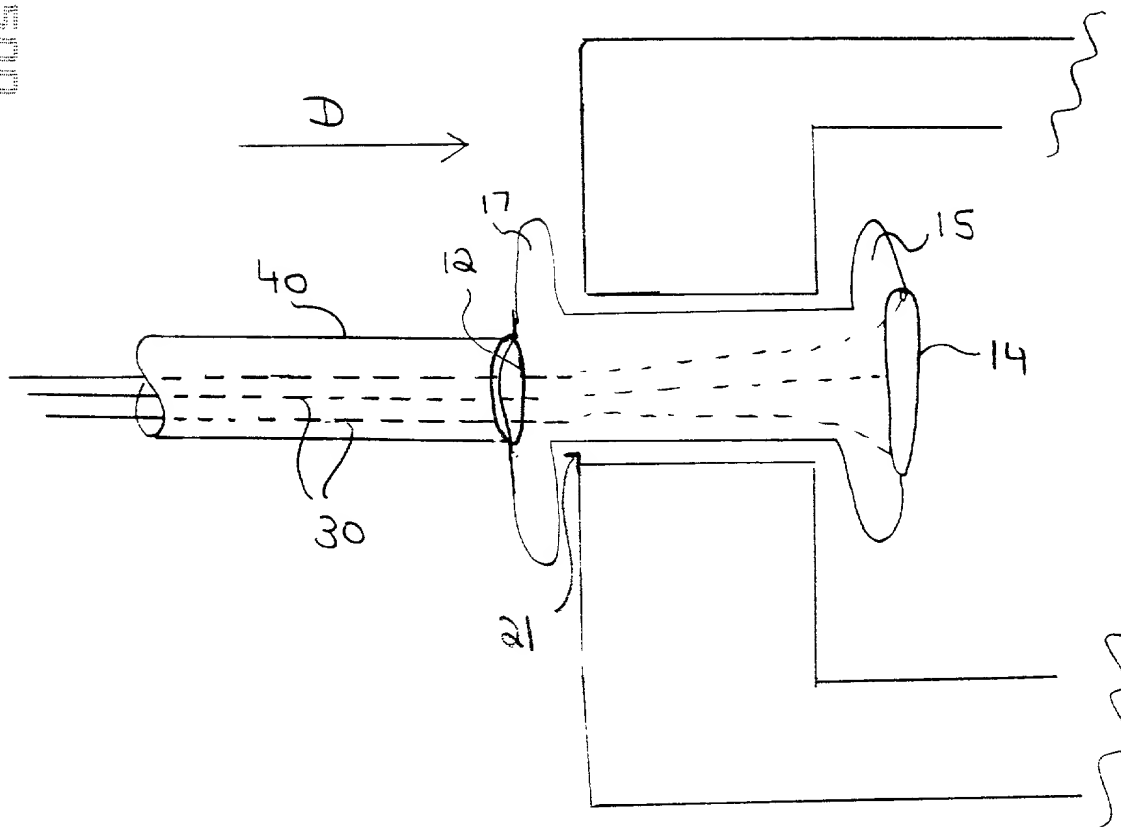


FIG 7

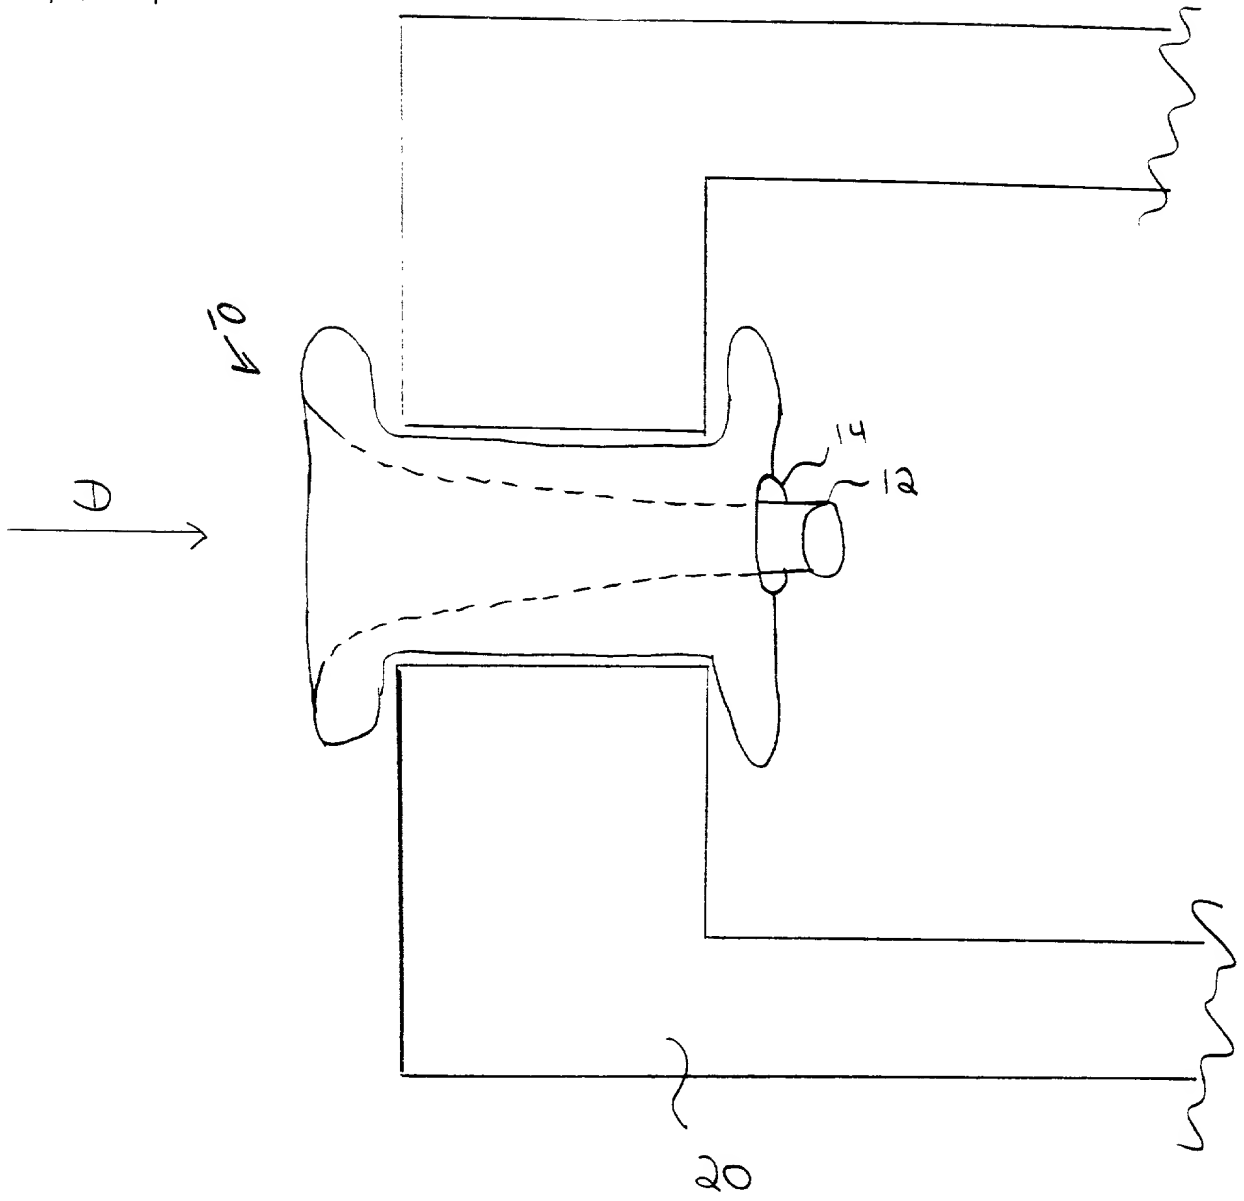


FIG 8


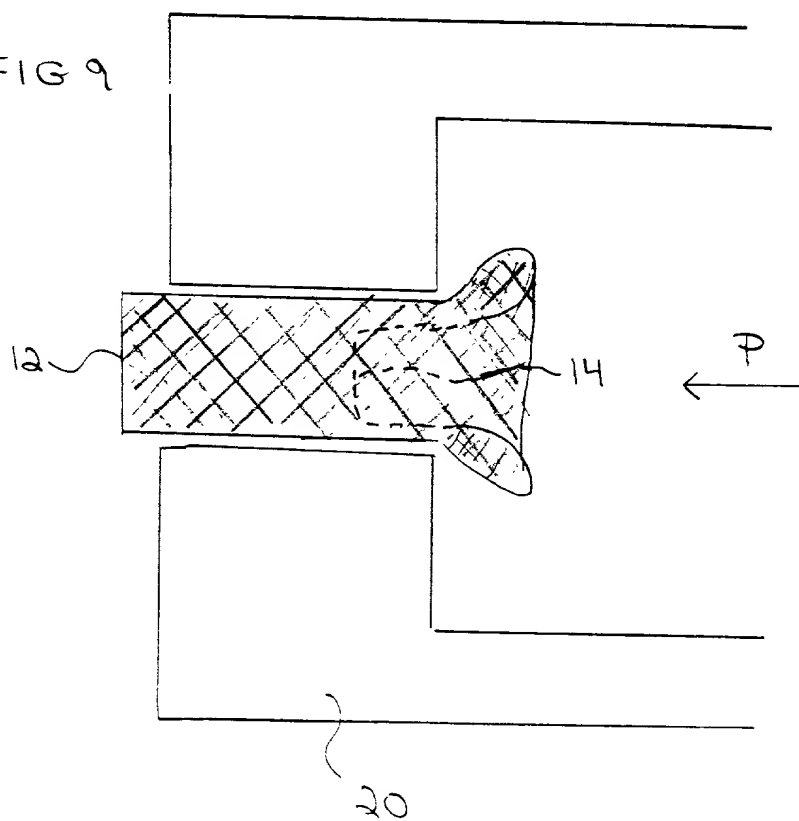


FIG 10

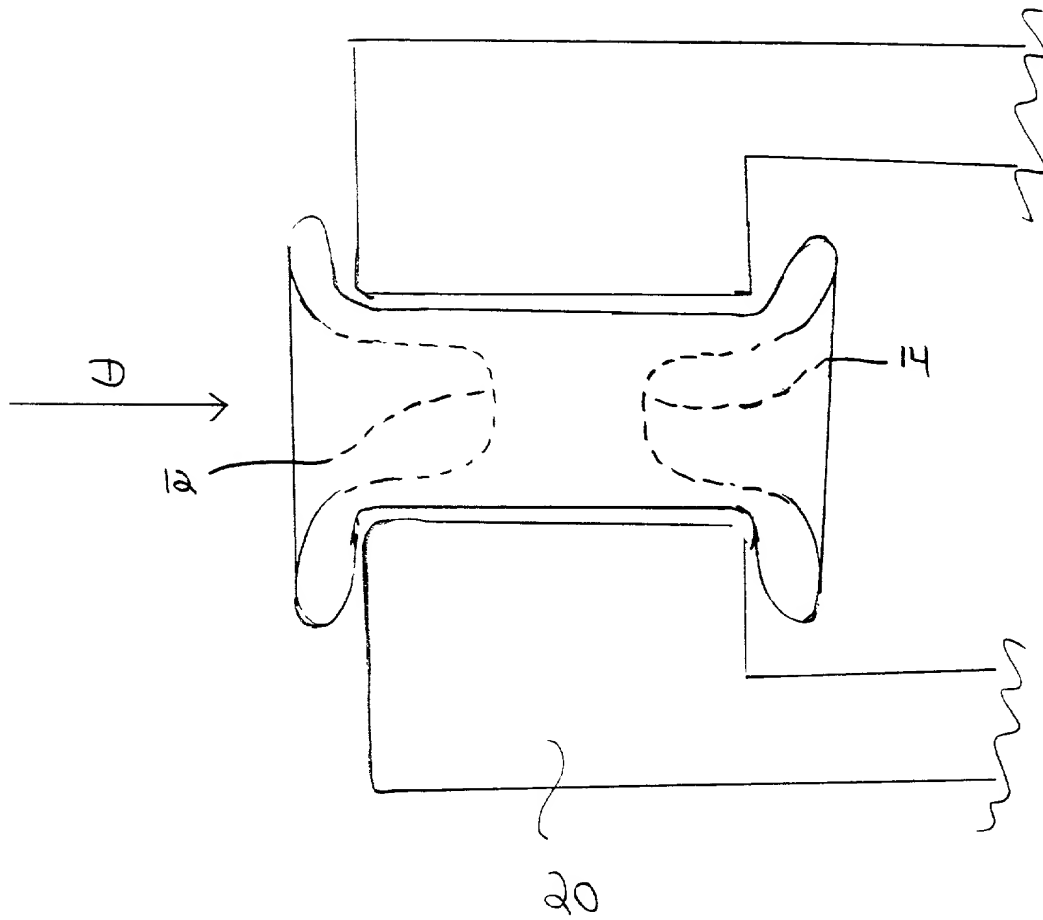

1. **Introduction**
 2. **Background**
 3. **Methods**
 4. **Results**
 5. **Conclusion**
 6. **References**
 7. **Appendix**
 8. **Figure 1**
 9. **Figure 2**
 10. **Figure 3**
 11. **Figure 4**
 12. **Figure 5**
 13. **Figure 6**
 14. **Figure 7**
 15. **Figure 8**
 16. **Figure 9**
 17. **Figure 10**
 18. **Figure 11**
 19. **Figure 12**
 20. **Figure 13**
 21. **Figure 14**
 22. **Figure 15**
 23. **Figure 16**
 24. **Figure 17**
 25. **Figure 18**
 26. **Figure 19**
 27. **Figure 20**
 28. **Figure 21**
 29. **Figure 22**
 30. **Figure 23**
 31. **Figure 24**
 32. **Figure 25**
 33. **Figure 26**
 34. **Figure 27**
 35. **Figure 28**
 36. **Figure 29**
 37. **Figure 30**
 38. **Figure 31**
 39. **Figure 32**
 40. **Figure 33**
 41. **Figure 34**
 42. **Figure 35**
 43. **Figure 36**
 44. **Figure 37**
 45. **Figure 38**
 46. **Figure 39**
 47. **Figure 40**
 48. **Figure 41**
 49. **Figure 42**
 50. **Figure 43**
 51. **Figure 44**
 52. **Figure 45**
 53. **Figure 46**
 54. **Figure 47**
 55. **Figure 48**
 56. **Figure 49**
 57. **Figure 50**
 58. **Figure 51**
 59. **Figure 52**
 60. **Figure 53**
 61. **Figure 54**
 62. **Figure 55**
 63. **Figure 56**
 64. **Figure 57**
 65. **Figure 58**
 66. **Figure 59**
 67. **Figure 60**
 68. **Figure 61**
 69. **Figure 62**
 70. **Figure 63**
 71. **Figure 64**
 72. **Figure 65**
 73. **Figure 66**
 74. **Figure 67**
 75. **Figure 68**
 76. **Figure 69**
 77. **Figure 70**
 78. **Figure 71**
 79. **Figure 72**
 80. **Figure 73**
 81. **Figure 74**
 82. **Figure 75**
 83. **Figure 76**
 84. **Figure 77**
 85. **Figure 78**
 86. **Figure 79**
 87. **Figure 80**
 88. **Figure 81**
 89. **Figure 82**
 90. **Figure 83**
 91. **Figure 84**
 92. **Figure 85**
 93. **Figure 86**
 94. **Figure 87**
 95. **Figure 88**
 96. **Figure 89**
 97. **Figure 90**
 98. **Figure 91**
 99. **Figure 92**
 100. **Figure 93**
 101. **Figure 94**
 102. **Figure 95**
 103. **Figure 96**
 104. **Figure 97**
 105. **Figure 98**
 106. **Figure 99**
 107. **Figure 100**
 108. **Figure 101**
 109. **Figure 102**
 110. **Figure 103**
 111. **Figure 104**
 112. **Figure 105**
 113. **Figure 106**
 114. **Figure 107**
 115. **Figure 108**
 116. **Figure 109**
 117. **Figure 110**
 118. **Figure 111**
 119. **Figure 112**
 120. **Figure 113**
 121. **Figure 114**
 122. **Figure 115**
 123. **Figure 116**
 124. **Figure 117**
 125. **Figure 118**
 126. **Figure 119**
 127. **Figure 120**
 128. **Figure 121**
 129. **Figure 122**
 130. **Figure 123**
 131. **Figure 124**
 132. **Figure 125**
 133. **Figure 126**
 134. **Figure 127**
 135. **Figure 128**
 136. **Figure 129**
 137. **Figure 130**
 138. **Figure 131**
 139. **Figure 132**
 140. **Figure 133**
 141. **Figure 134**
 142. **Figure 135**
 143. **Figure 136**
 144. **Figure 137**
 145. **Figure 138**
 146. **Figure 139**
 147. **Figure 140**
 148. **Figure 141**
 149. **Figure 142**
 150. **Figure 143**
 151. **Figure 144**
 152. **Figure 145**
 153. **Figure 146**
 154. **Figure 147**
 155. **Figure 148**
 156. **Figure 149**
 157. **Figure 150**
 158. **Figure 151**
 159. **Figure 152**
 160. **Figure 153**
 161. **Figure 154**
 162. **Figure 155**
 163. **Figure 156**
 164. **Figure 157**
 165. **Figure 158**
 166. **Figure 159**
 167. **Figure 160**
 168. **Figure 161**
 169. **Figure 162**
 170. **Figure 163**
 171. **Figure 164**
 172. **Figure 165**
 173. **Figure 166**
 174. **Figure 167**
 175. **Figure 168**
 176. **Figure 169**
 177. **Figure 170**
 178. **Figure 171**
 179. **Figure 172**
 180. **Figure 173**
 181. **Figure 174**
 182. **Figure 175**
 183. **Figure 176**
 184. **Figure 177**
 185. **Figure 178**
 186. **Figure 179**
 187. **Figure 180**
 188. **Figure 181**
 189. **Figure 182**
 190. **Figure 183**
 191. **Figure 184**
 192. **Figure 185**
 193. **Figure 186**
 194. **Figure 187**
 195. **Figure 188**
 196. **Figure 189**
 197. **Figure 190**
 198. **Figure 191**
 199. **Figure 192**
 200. **Figure 193**
 201. **Figure 194**
 202. **Figure 195**
 203. **Figure 196**
 204. **Figure 197**
 205. **Figure 198**
 206. **Figure 199**
 207. **Figure 200**
 208. **Figure 201**
 209. **Figure 202**
 210. **Figure 203**
 211. **Figure 204**
 212. **Figure 205**
 213. **Figure 206**
 214. **Figure 207**
 215. **Figure 208**
 216. **Figure 209**
 217. **Figure 210**

FIG 11


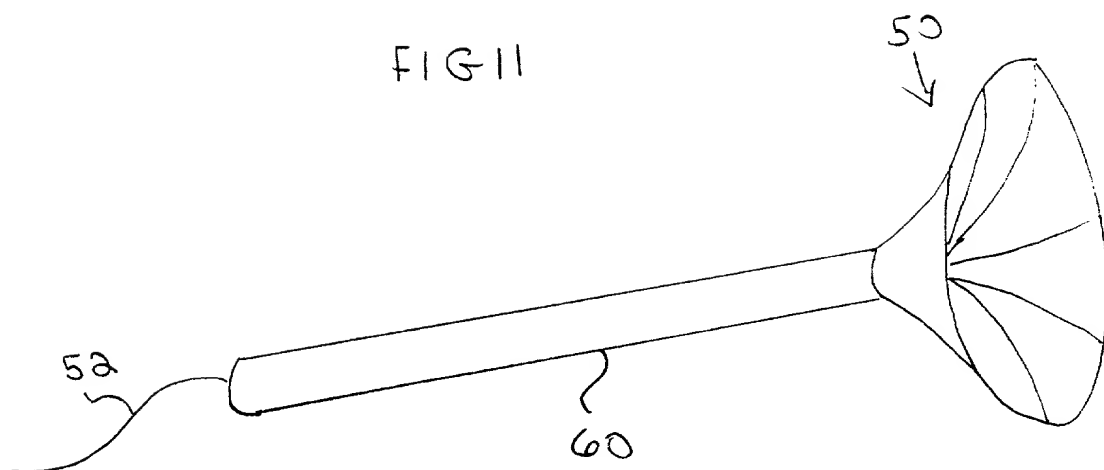


FIG 12A

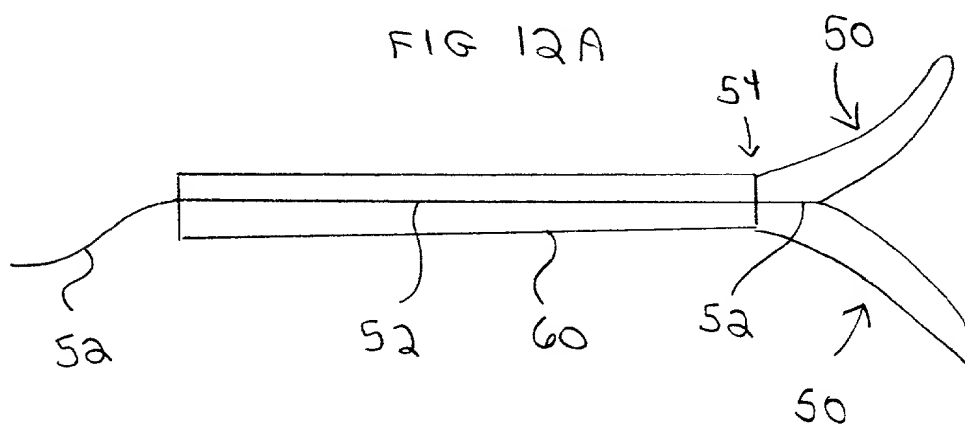

[illegible]

FIG 13A

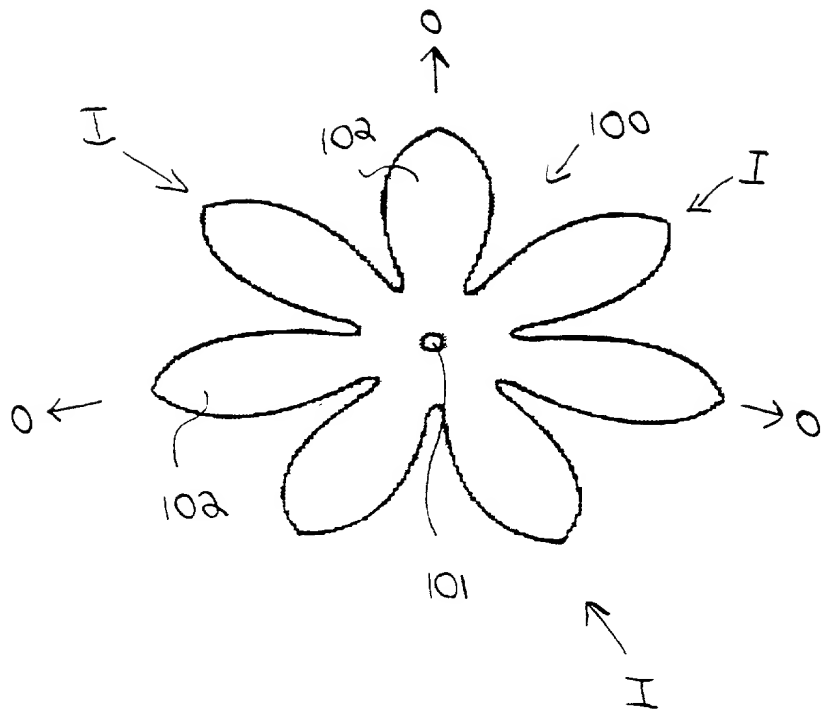


FIG 13B

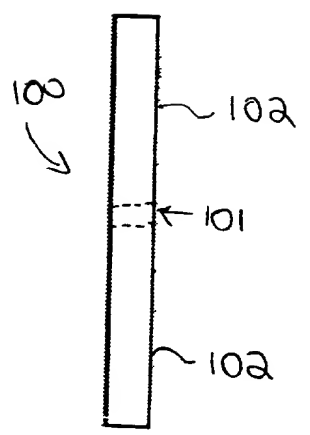


FIG 14

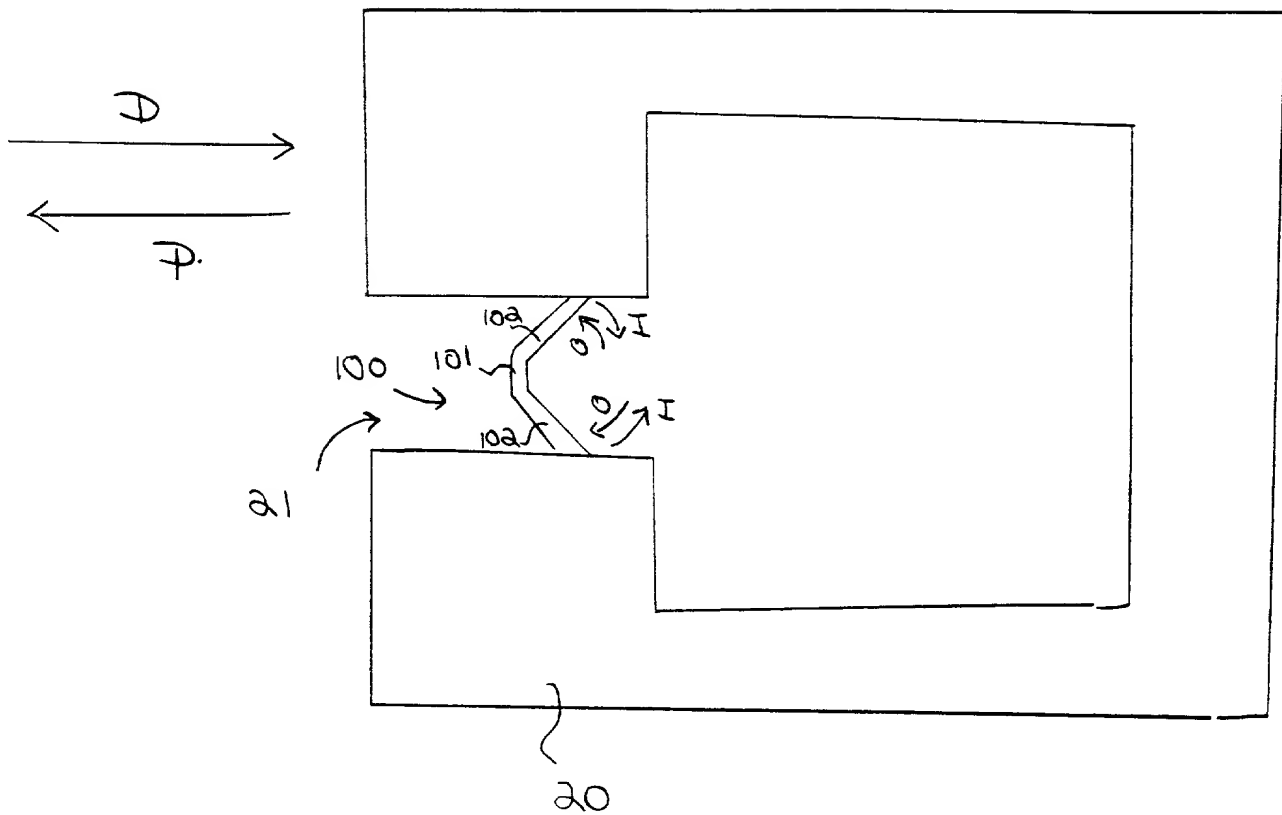


FIG 15

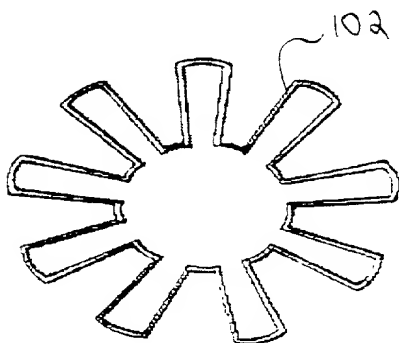
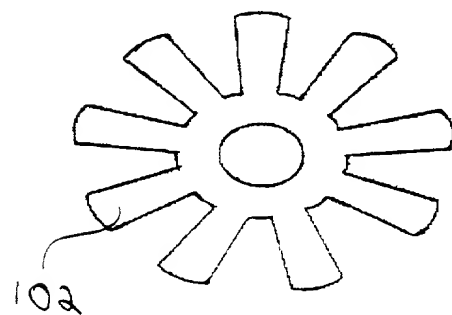
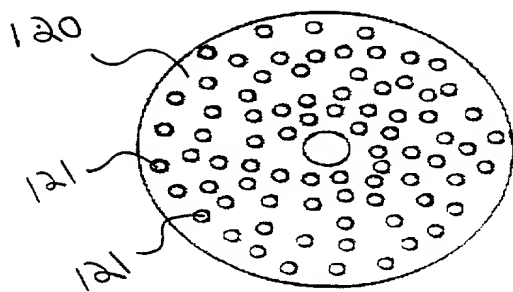
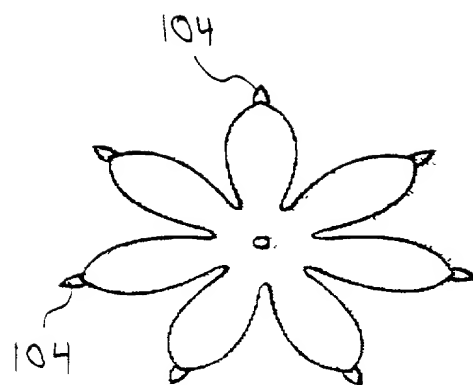
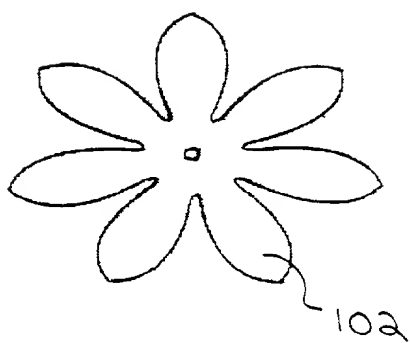


FIG 16

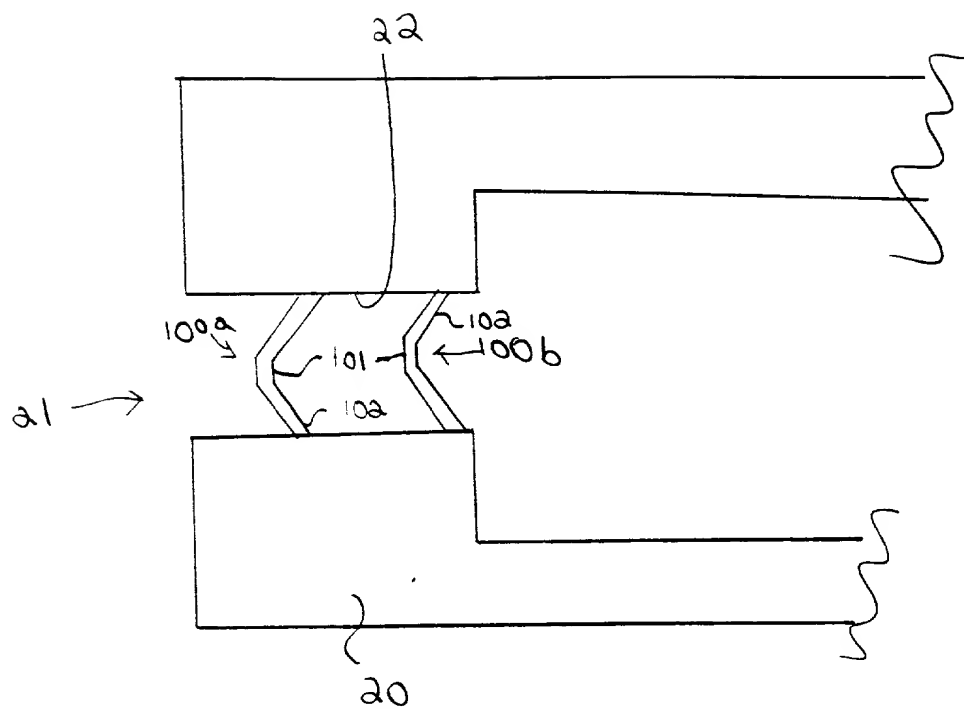


FIG 17

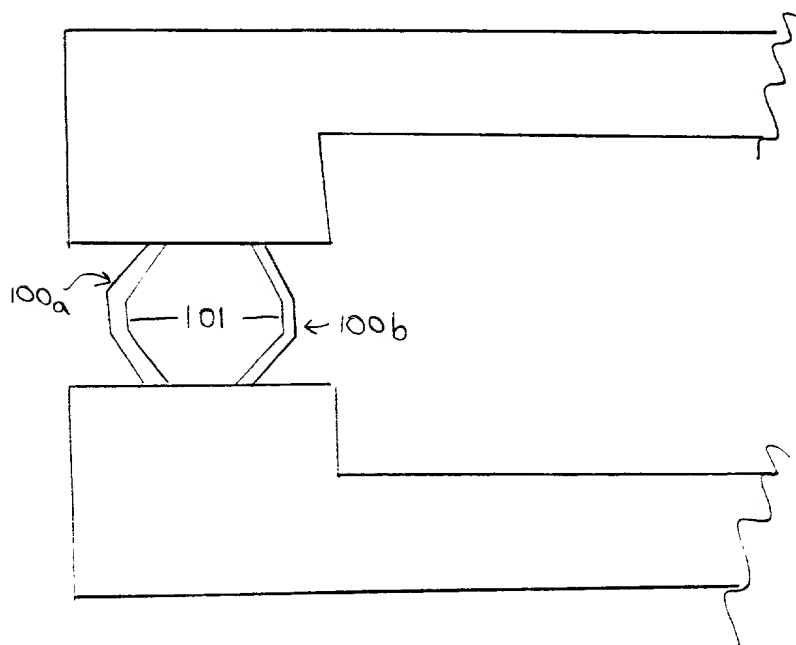


FIG 18

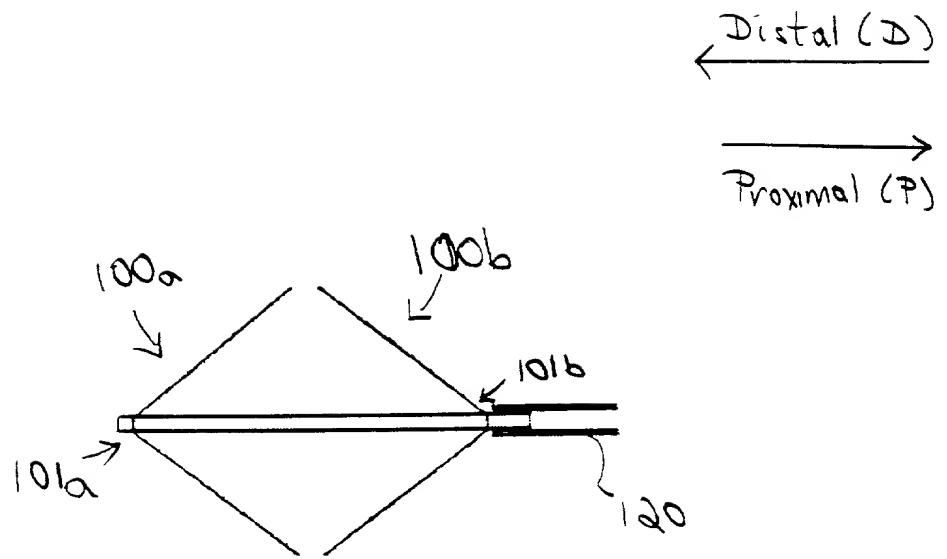


FIG 19


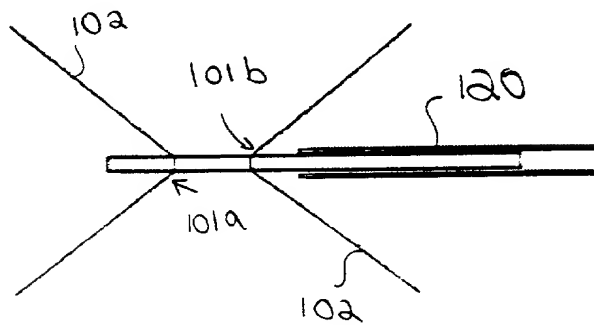


FIG 20

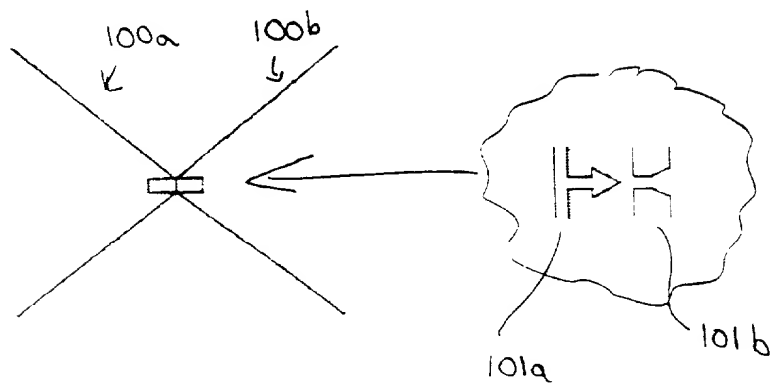

DECLARATION

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **ANNULOTOMY CLOSURE DEVICE** the specification of which X is attached hereto or was filed on as Application No. and was amended on (if applicable).

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date
60/154,969	September 20, 1999

Full Name of Inventor 1:	Last Name: MATSUURA	First Name: DAVID	Middle Name or Initial: G.	
Residence & Citizenship:	City: Encinitas	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 859 Summersong Court	City: Encinitas	State/Country: California	Postal Code: 92024
Full Name of Inventor 2:	Last Name: GILLESPIE	First Name: WALTER	Middle Name or Initial: D.	
Residence & Citizenship:	City: La Mesa	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 8652 Hayes Street	City: La Mesa	State/Country: California	Postal Code: 91941
Full Name of Inventor 3:	Last Name: MARINO	First Name: JAMES	Middle Name or Initial: F.	
Residence & Citizenship:	City: La Jolla	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 2620 St. Tropez Place	City: La Jolla	State/Country: California	Postal Code: 92037
Full Name of Inventor 4:	Last Name: PASTORE	First Name: SELISE	Middle Name or Initial: M.	
Residence & Citizenship:	City: San Diego	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 1837 Spalding place	City: San Diego	State/Country: California	Postal Code: 92116

DECLARATION

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 1 _____ DAVID G. MATSUURA Date	Signature of Inventor 2 _____ WALTER D. GILLESPIE Date	Signature of Inventor 3 _____ JAMES F. MARINO Date
Signature of Inventor 4 _____ SELISE M. PASTORE Date		

PA 3096253 v1